



ZHEJIANG UNIU-NE Technology CO., LTD

浙江宇力微新能源科技有限公司



78M05 Data Sheet

V 1.1

版权归浙江宇力微新能源科技有限公司

78M05 Three-terminal positive Voltage Regulator

FEATURES


- Output Current in Excess of 0.5A
- Output Voltage is 5V
- Internal thermal Overload protection
- Internal Short Circuit Current Limiting

PIN CONNECTION

1.INPUT

2. GND

3. OUTPUT



1 2 3

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

Characteristics	Symbol	Value	Unit
Input Voltage	V_i	35	V
Operating Temperature	T_{opr}	-40 ~ 85	°C
Storage Temperature Range	T_{stg}	-55 ~ 150	°C


ELECTRICAL CHARACTERISTICS

(unless otherwise noted, $V_i=10V$, $I_o=350mA$, $-30^{\circ}C < T_j < 85^{\circ}C$, $C_1=0.33\mu F$, $C_o=0.1\mu F$)

Characteristics	Symbol	Test conditions	Min.	Typ.	Max.	Unit
Output Voltage	V_o	$T_j=25^{\circ}C$	4.8	5.0	5.2	V
		$7V \leq V_i \leq 20V, I_o=5mA \sim 350mA$	4.75	5	5.25	
Load Regulation	ΔV_o	$T_j=25^{\circ}C, I_o=5mA \sim 500mA$		25	100	mV
		$T_j=25^{\circ}C, I_o=5mA \sim 200mA$		10	50	
Line Regulation	ΔV_o	$7V \leq V_i \leq 25V, I_o=200mA, T_j=25^{\circ}C$		4	100	mV
		$8V \leq V_i \leq 25V, I_o=200mA, T_j=25^{\circ}C$		2	50	
Quiescent Current	I_q	$T_j=25^{\circ}C$		4	6	mA
Quiescent Current Charge	ΔI_q	$8V \leq V_i \leq 25V, I_o=200mA$			0.8	mA
		$5mA \leq I_o \leq 350mA$			0.5	


Continues:

Characteristics	Symbol	Test conditions	Min.	Typ.	Max.	Unit
Output Noise Voltage	V_N	$10\text{Hz} \leq f \leq 100\text{kHz}$, $T_j = 25^\circ\text{C}$		40	200	μV
Dropout Voltage	V_d	$T_j = 25^\circ\text{C}$		2		V
Ripple Rejection	RR	$8\text{V} \leq V_i \leq 18\text{V}$, $f = 120\text{Hz}$, $I_o = 300\text{mA}$, $T_j = 25^\circ\text{C}$	56	80		dB
Short Circuit Current Limit	I_{sc}	$T_j = 25^\circ\text{C}$		1.5		A

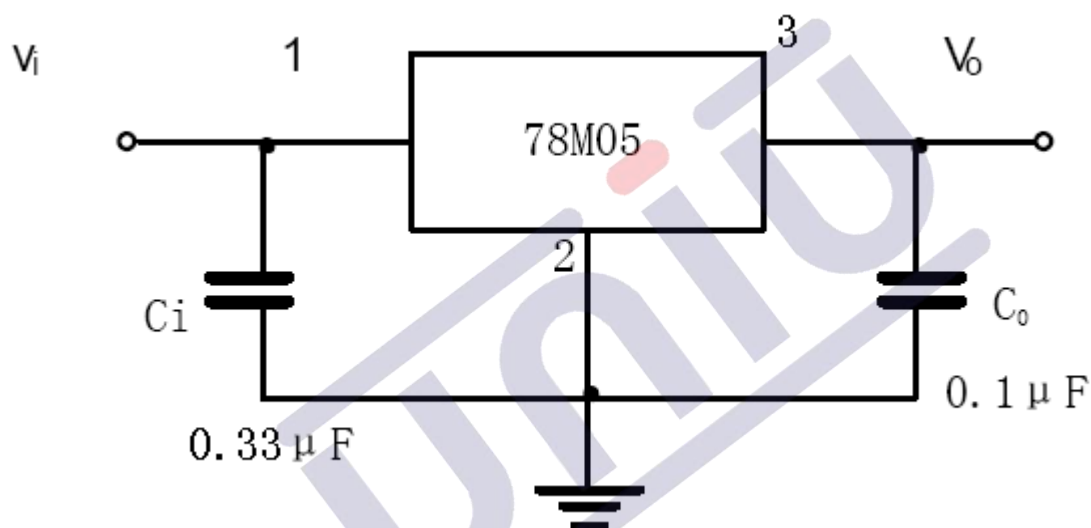APPLICATION CIRCUIT

*Bypass capacitors are recommended for optimum stability and transient response and should be located as close as Possible to the regulators.

OUTLINE DRAWING

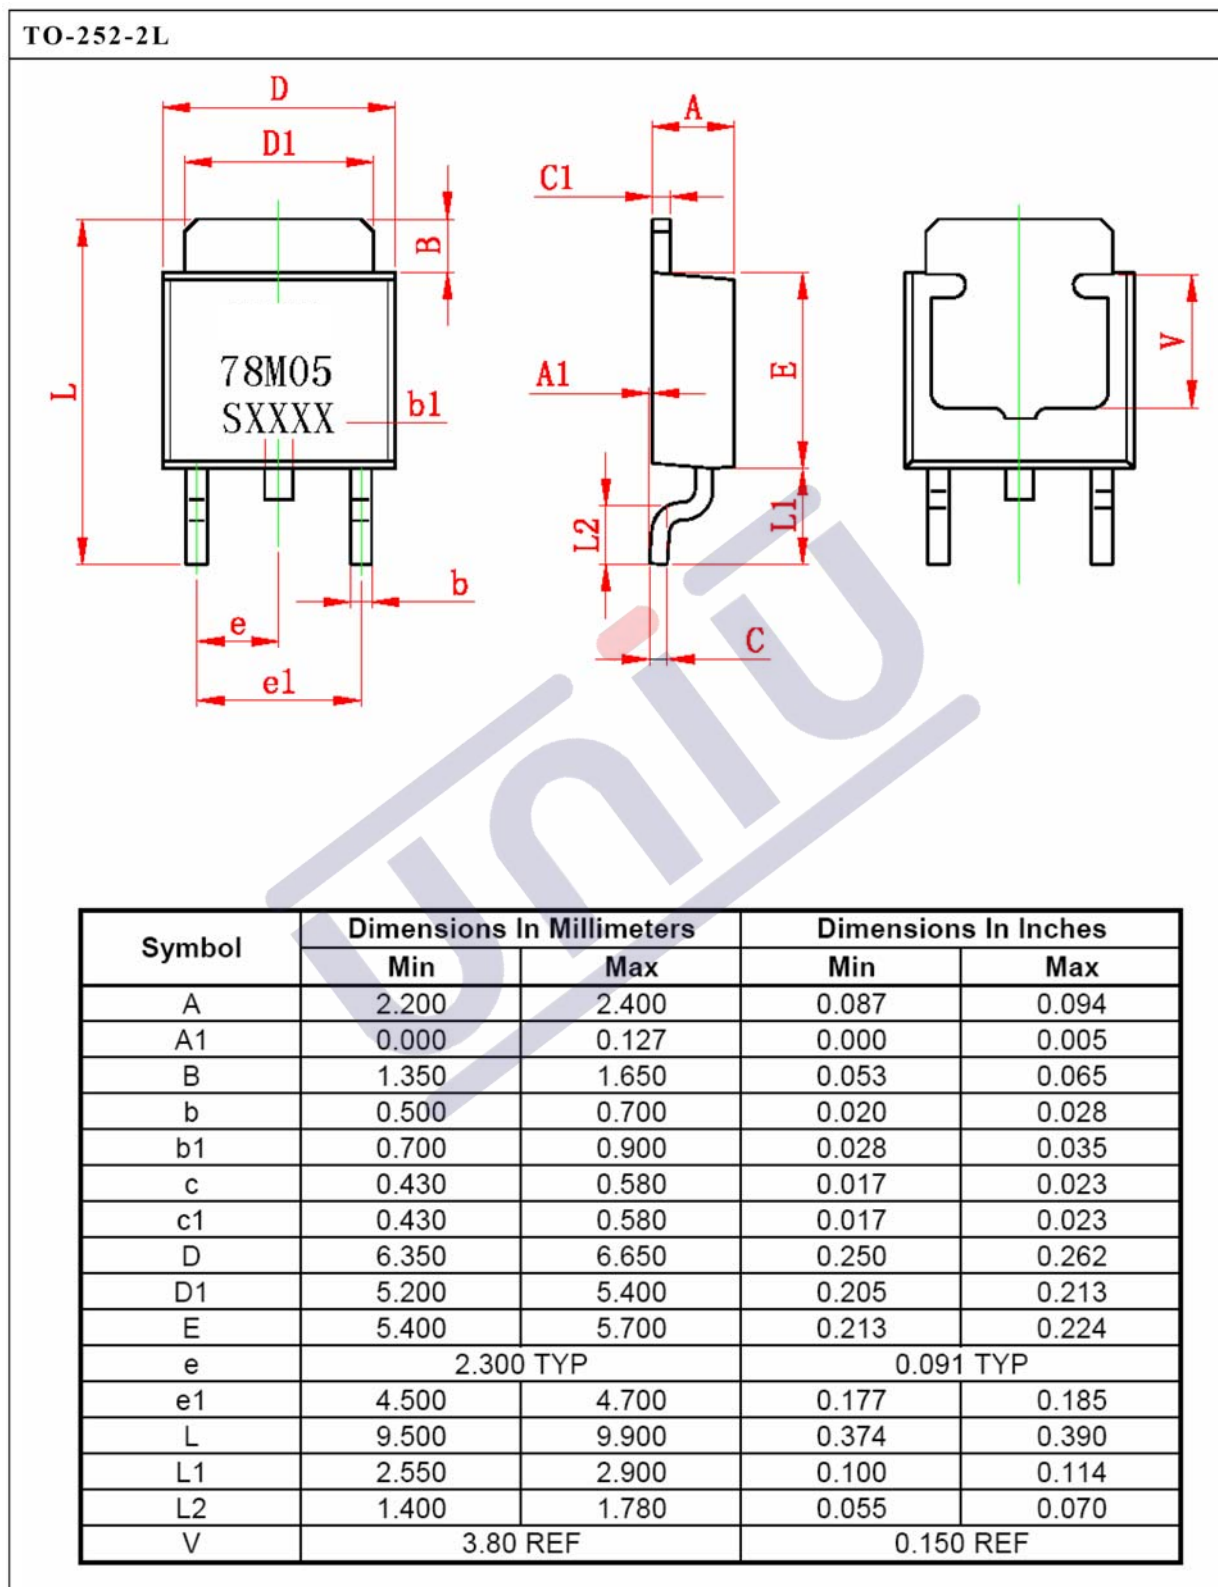

1.版本记录

DATE	REV.	DESCRIPTION
2018/07/14	1.0	First Release
2019/07/13	1.1	Layout adjustment

2.免责声明

浙江宇力微新能源科技有限公司保留对本文档的更改和解释权力，不另行通知！客户在下单前应获取我司最新版本资料，并验证相关信息是否最新和完整。量产方案需使用方自行验证并自担所有批量风险责任。未经我司授权，该文件不得私自复制和修改。产品不断提升，以追求高品质、稳定性强、可靠性高、环保、节能、高效为目标，我司将竭诚为客户提供性价比高的系统开发方案、技术支持等更优秀的服务。

版权所有 浙江宇力微新能源科技有限公司/绍兴宇力半导体有限公司

3.联系我们

浙江宇力微新能源科技有限公司

总部地址：绍兴市越城区斗门街道袍渚路25号中节能科创园45幢4/5楼

电话：0575-85087896（研发部）

传真：0575-88125157

E-mail: htw@uni-semic.com

无锡地址：无锡市锡山区先锋中路 6 号中国电子（无锡）数字芯城 1#综合楼 503室

电 话：0510-85297939

E-mail: zh@uni-semic.com

深圳地址：深圳市宝安区西乡街道南昌社区宝源路泳辉国际商务大厦410

电 话：0755-84510976

E-mail: htw@uni-semic.com